

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)


S1 & S2:
LASER V-COAT

R(abs) <0.25% @ 1064nm
R(avg) <1.5% @ 985 - 1140nm

 3. FINE GROUND SURFACE



4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

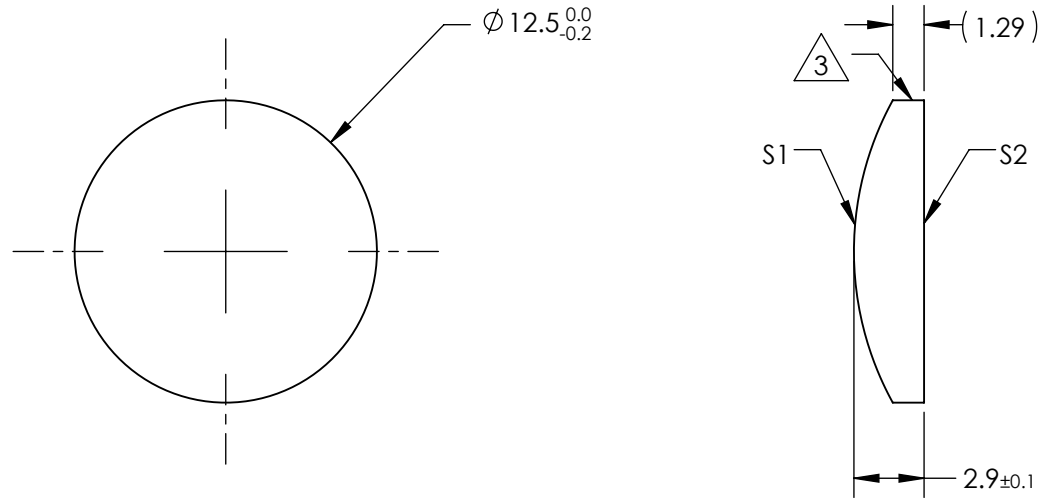

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	25±3%	 Edmund Optics®
SHAPE	CONVEX	PLANO	BFL	(23.09)	
RADIUS	12.96	∞	THIRD ANGLE PROJECTION 		
SURFACE QUALITY	60-40	60-40	ALL DIMS IN		DWG NO
CLEAR APERTURE	∅ 11.50	∅ 11.50	mm		33231
COATING APERTURE	∅ 11.50	∅ 11.50			SHEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED			1 OF 1