
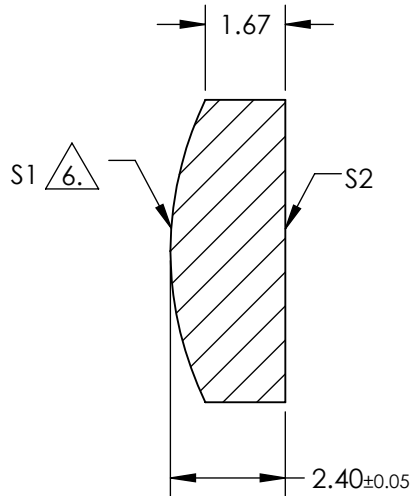


NOTES:

1. SUBSTRATE:
D-ZK3
2. NUMERICAL APERTURE: 0.22
3. COATING
S1 & S2: R(AVG) ≤ 0.5% @ 350 - 700nm
4. FOCAL LENGTH TOLERANCE: ±1%
5. TRANSMITTED WAVEFRONT ERROR (λ, RMS): < 0.145
6. ASPERIC SURFACE DESCRIBED BY (REF COEFFICIENT TABLE)

$$Z_{ASPH}(Y) = \frac{(\frac{1}{RADIUS}) * Y^2}{1 + \sqrt{1 - (1+k) * (\frac{1}{RADIUS})^2 * Y^2}} + D * Y^2 + E * Y^4 + F * Y^6 + G * Y^8 + H * Y^{10} + J * Y^{12} + L * Y^{14}$$

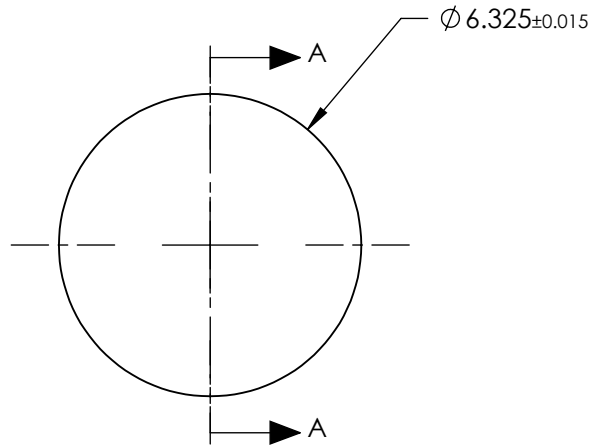

COEFFICIENT TABLE 6.	
COEFFICIENT	S1
SEMI-DIAMETER	3.162500E+00
(1/RADIUS)	1.426045E-01
k	-1.381600E+00
D	0.000000E+00
E	2.923100E-04
F	-1.306800E-07
G	2.807700E-09
H	-2.157900E-11
J	0.000000E+00
L	0.000000E+00

FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2	EFL	12.00	Edmund Optics®	0.22 NA 12mm FL 350-700nm COATED, LASER TOOL ASPHERIC LENS	TITLE	
SHAPE	CONVEX	PLANO	BFL	10.60				
RADIUS	7.01	INFINITY	THIRD ANGLE PROJECTION		DWG NO			
SURFACE QUALITY	60 - 40	60 - 40	ALL DIMS IN		mm		83689	
CLEAR APERTURE	Ø5.20	Ø5.20			SHEET		1 OF 1	
BEVEL MAX	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED			1 OF 1			