

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)




S1 & S2: MgF2

R(avg) ≤ 1.75% @ 400 - 700nm

3. FINE GROUND SURFACE



4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

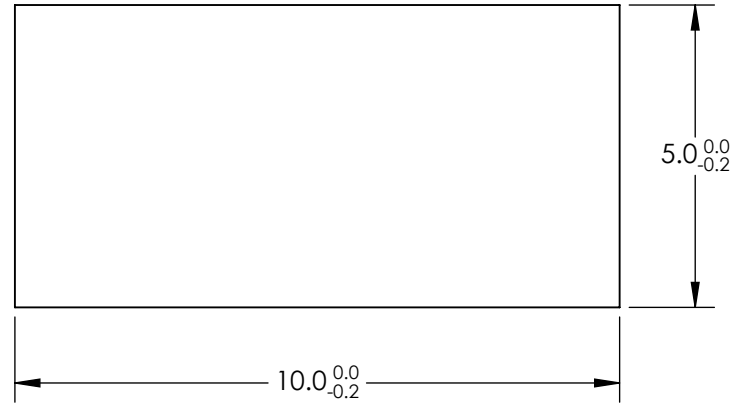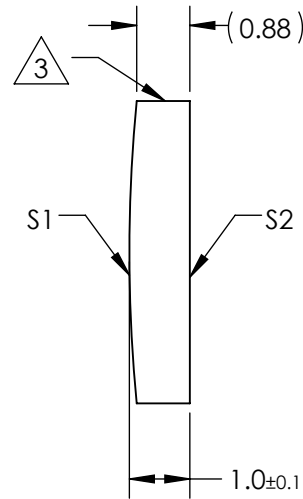

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	50	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	49.34			
RADIUS	25.8	∞	THIRD ANGLE PROJECTION 		TITLE	5mm H X 10mm L X 50mm FL MgF2 COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	47766	SHEET 1 OF 1
CLEAR APERTURE	9.00 X 4.00	9.00 X 4.00					
COATING APERTURE	9.00 X 4.00	9.00 X 4.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					