

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7

2. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: VIS-NIR

R(abs) ≤0.25% @ 880nm




R(avg) ≤1.25% @ 400 - 870nm

R(avg) ≤1.25% @ 890 - 1000nm

3. FINE GROUND SURFACE



4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

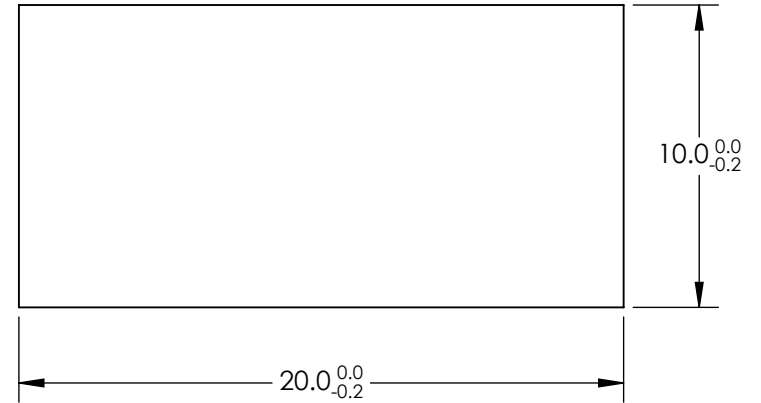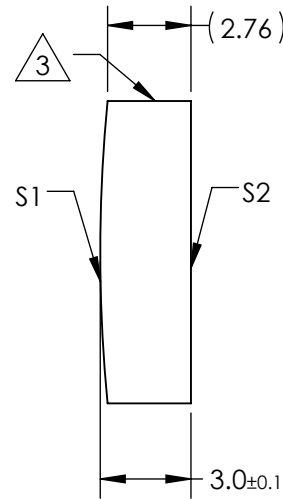

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2	EFL	100	 Edmund Optics®		
SHAPE	CONVEX	PLANO	BFL	97.92			
RADIUS	51.63	∞	THIRD ANGLE PROJECTION 		TITLE	10mm H X 20mm L X 100mm FL VIS-NIR COATED, CYLINDER LENS	
SURFACE QUALITY	60-40	60-40	ALL DIMS IN	mm	DWG NO	47969	SHEET 1 OF 1
CLEAR APERTURE	9.00 X 19.00	9.00 X 19.00					
COATING APERTURE	9.00 X 19.00	9.00 X 19.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					