

NOTES:

1. SUBSTRATE MATERIAL:
N-BK7
2. COATING (APPLY ACROSS CLEAR APERTURE)



S1 & S2: NIR I

R(avg) ≤0.5% @ 600 - 1050nm

3. FINE GROUND SURFACE

4. POWER, IRREGULARITY, AND SURFACE QUALITY SPECIFICATIONS APPLY ACROSS CLEAR APERTURE

5. RoHS COMPLIANT

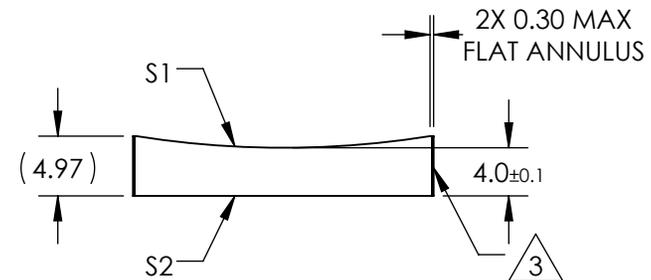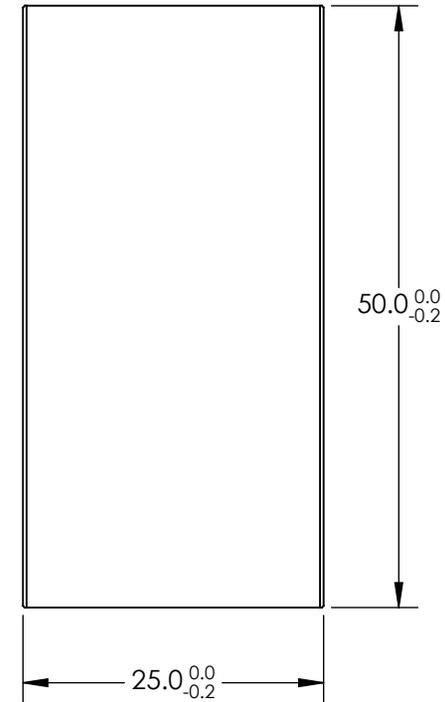

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2					
SHAPE	CONVEX	PLANO	EFL	-150		Edmund Optics®	
RADIUS	77.52	∞	BFL	-152.64			
SURFACE QUALITY	60-40	60-40	THIRD ANGLE PROJECTION		TITLE	25mm H X 50mm L X -150mm FL NIR I COATED, CYLINDER LENS	
CLEAR APERTURE	24.00 X 49.00	24.00 X 49.00			ALL DIMS IN	mm	DWG NO
COATING APERTURE	24.00 X 49.00	24.00 X 49.00					
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED					