
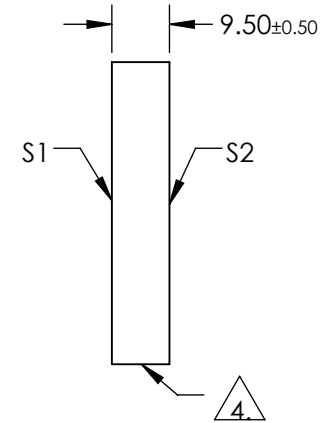
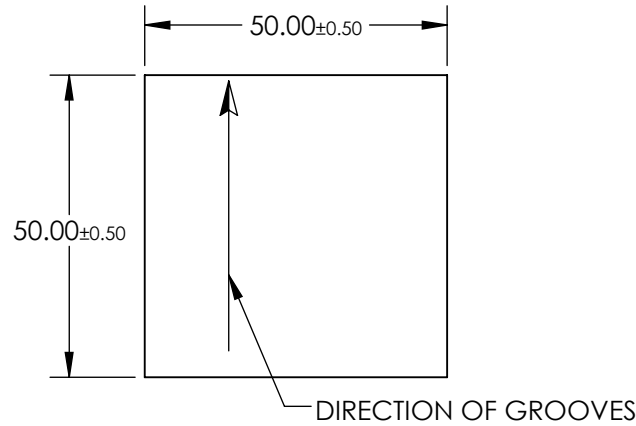


NOTES:

1. SUBSTRATE MATERIAL:  
FLOAT GLASS
2. COATING (APPLW ACROSS CLEAR APERTURE):  
S1: BARE ALUMINUM  
S2: NONE
3. BLAZE ANGLE: 2° 34'  
NOMINAL BLAZE WAVELENGTH: 300nm  
EFFICIENCY: 60-80% @ BLAZE WAVELENGTH

4. EDGES GROUND
5. RoHS COMPLIANT

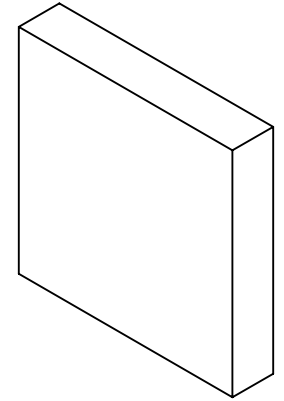

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

**EO**® Edmund Optics®

|                |             |             |                        |    |        |                                  |              |
|----------------|-------------|-------------|------------------------|----|--------|----------------------------------|--------------|
|                | S1          | S2          | THIRD ANGLE PROJECTION |    | TITLE  | GRATING DIFF 300GR 300nm 50 x 50 |              |
| SHAPE          | PLANO       | PLANO       | ALL DIMS IN            | mm | DWG NO | 48459                            | SHEET 1 OF 1 |
| CLEAR APERTURE | 45.0 x 45.0 | 45.0 x 45.0 |                        |    |        |                                  |              |