

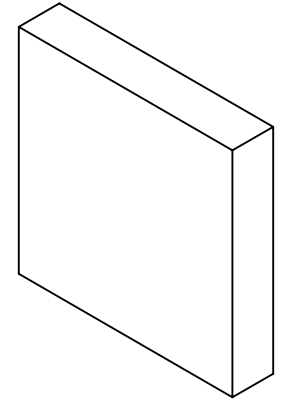


NOTES:

1. SUBSTRATE MATERIAL:
FLOAT GLASS
2. COATING (APPLW ACROSS CLEAR APERTURE):
S1: BARE ALUMINUM
S2: NONE
3. BLAZE ANGLE: 13° 53'
NOMINAL BLAZE WAVELENGTH: 400nm
EFFICIENCY: 60-80% @ BLAZE WAVELENGTH

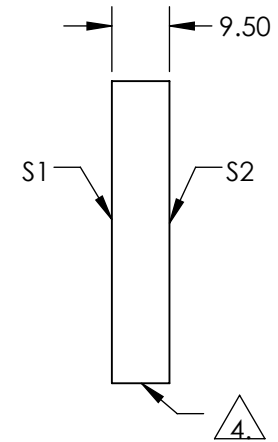

4. EDGES GROUND
5. RoHS COMPLIANT

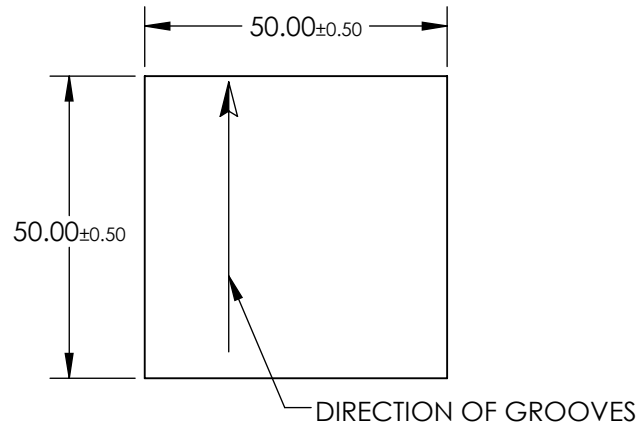

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO® Edmund Optics®

| | | | | | | |
|----------------|-------------|-------------|------------------------|-------------|-----------------------------------|--------------|
| REV. A. | S1 | S2 | THIRD ANGLE PROJECTION | TITLE | GRATING DIFF 1200GR 400nm 50 x 50 | |
| SHAPE | PLANO | PLANO | | ALL DIMS IN | mm | DWG NO |
| CLEAR APERTURE | 45.0 x 45.0 | 45.0 x 45.0 | | | | SHEET 1 OF 1 |