
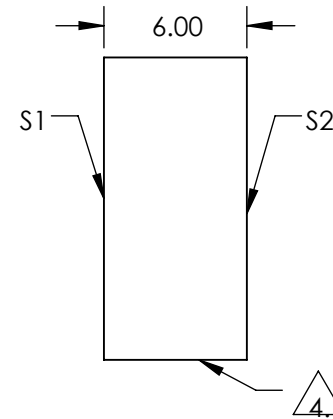
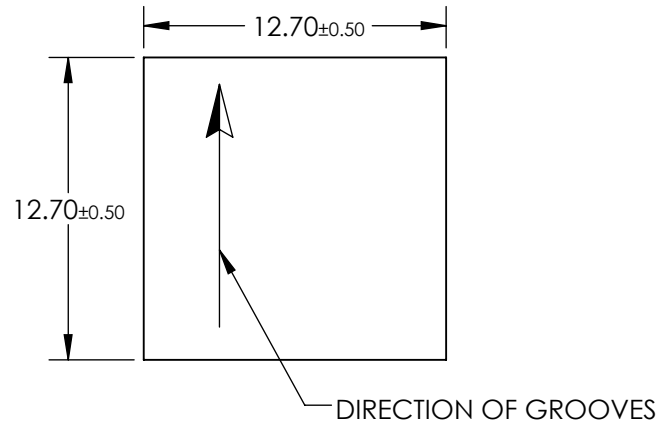


NOTES:

1. SUBSTRATE MATERIAL:
FLOAT GLASS
2. COATING (APPLY ACROSS CLEAR APERTURE):
S1: BARE ALUMINUM
S2: NONE
3. WAVELENGTH RANGE: 250-400nm
ABSOLUTE DIFFRACTION EFFICIENCY: 45-65%
GROOVE DENSITY: 2400 grooves/mm

4. EDGES GROUND

5. RoHS COMPLIANT



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

EO® Edmund Optics®

REV. A.	S1	S2	THIRD ANGLE PROJECTION		TITLE	GRATING HOLO 2400GR UV 12.7 X 12.7	
SHAPE	PLANO	PLANO	ALL DIMS IN	mm	DWG NO	43776	SHEET 1 OF 1
CLEAR APERTURE	11.43 x 11.43	11.43 x 11.43					