




NOTES:

1. SUBSTRATE: FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: NONE
 - S2: 266nm Laser AR Coating
 - R(ABS) < 0.25% @ 266nm @ 0° AOI
- DAMAGE THRESHOLD
 - PULSED: 3J/cm² @ 20ns, 20Hz @ 266nm



 FINE GRIND SURFACE

4. ROHS COMPLIANT

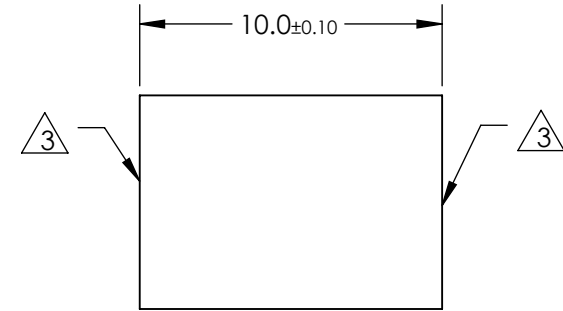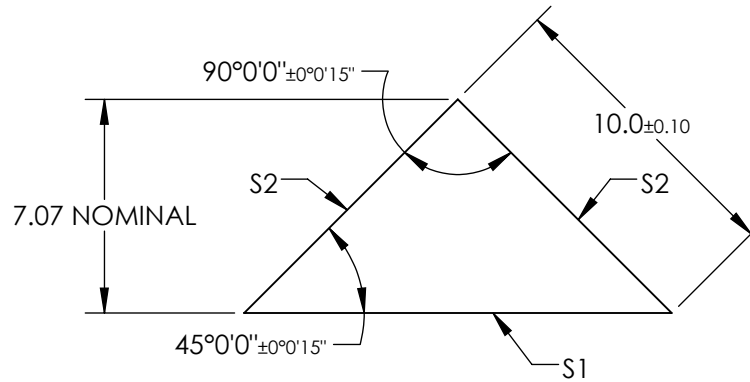


**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	11.45 X 9.00	Ø9.00
SURFACE FLATNESS	λ/20	λ/20
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION



ALL DIMS IN

mm

 **Edmund Optics®**

TITLE	10mm 1/20 WV 266nm AR CTD HT RA FS PRISM		
DWG NO	37617	SHEET	1 OF 1